

GLORIA 18

 **WARRANTY 5 YEARS**



Color: T15 Tela

FEATURES

P. max: **8 bar**

T. max: **110°C**

Functioning: **hot water**

Connections: **n° 2 x 1/2" G - 1 x 1/2" G**

MATERIAL:

- Ø 30 mm collectors in painted mild steel.
- Ø 18 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages II and III.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy (see page 350)

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored









Thermostatic head Kristal TC fully colored

Complete list, codes and details of the ACCESSORIES from page 332.



Detail of the 50 mm pipe-centres version.

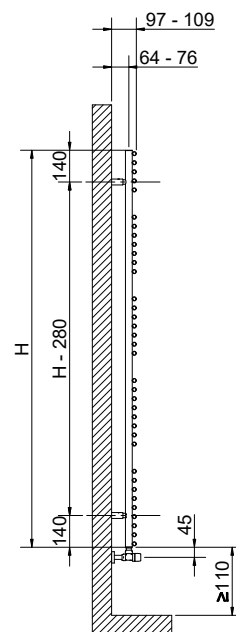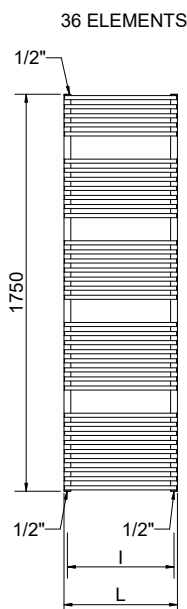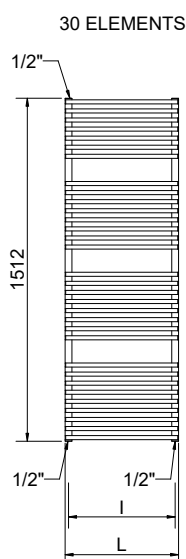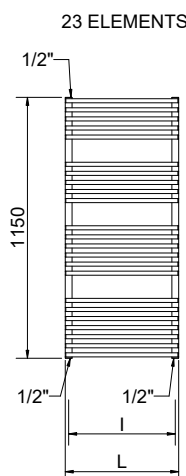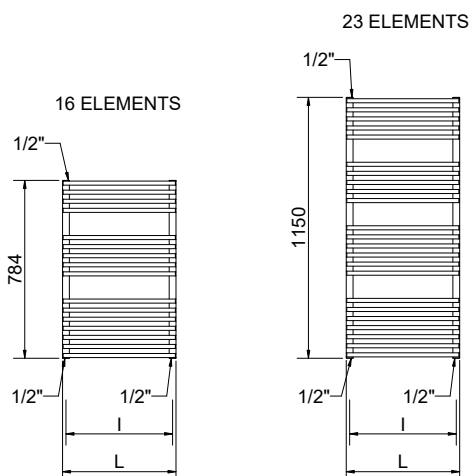

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

GLORIA 18

Height	Width	Pipe Centres	Art. nr.	Art. nr.	Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.	Dual energy kit
[mm]	L [mm]	I [mm]	R01 White	R01 White	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
784	430	400	3551666100140	3551666100163	5,1	0,537	2,2	352	194	1,1666	300
	480	450	3551666100141	3551666100164	5,5	0,582	2,4	379	210	1,1571	300
	530	500	3551666100142	3551666100165	5,6	0,627	2,6	406	226	1,1476	400
	580	550	3551666100143	3551666100166	6,3	0,673	2,7	433	242	1,1382	400
1150	430	400	3551666100145	3551666100168	7,3	0,77	3,2	483	262	1,1981	500
	480	450	3551666100146	3551666100169	7,9	0,84	3,4	524	285	1,1927	500
	530	500	3551666100147	3551666100170	8	0,906	3,7	566	309	1,1873	600
	580	550	3551666100148	3551666100171	9,1	0,971	3,8	608	332	1,1818	600
1500	430	400	3551666100150	3551666100173	10	1,063	4,4	628	338	1,2138	600
	480	450	3551666100151	3551666100174	10,8	1,154	4,7	685	369	1,2111	700
	530	500	3551666100152	3551666100175	11	1,238	5	743	401	1,2084	700
	580	550	3551666100153	3551666100176	12,4	1,335	5,3	800	432	1,2056	700
1750	430	400	3551666100155	3551666100178	11,4	1,205	5	734	393	1,2242	700
	480	450	3551666100156	3551666100179	12,3	1,307	5,3	803	430	1,2232	700
	530	500	3551666100157	3551666100180	12,5	1,409	5,7	871	467	1,2223	900
	580	550	3551666100158	3551666100181	14,1	1,511	6	940	504	1,2213	900

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$