



KELLY 5010

**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel $\varnothing$ 1,5 inch.
- Horizontal heating elements in painted mild steel 2,0x0,4 inch.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy
- ☒ Blower (see page 340)
- ☒ Blower dual energy

P. Max: 5 bar

Functioning: hot water


T. Max: 230° F

Connections: n° 2 x 1/2" G - 2 x 1/2" G

CERTIFICATES



UPSIDE DOWN




ACCESSORIES



**Kristal valve square
pipe centres 2,0 inch left
white R01**

Copper conn. $\varnothing$ 12/14/15
Art. nr. 5991990311188

Multilayer conn. $\varnothing$ 16
Art. nr. 5991990311187




Quotes for square Kristal valves with thermostatic option



**Thermostatic head
white**

(Kit 2 pieces)

Art. nr. 5035270710016




Thermostatic head quotes



**Thermostatic head
chromed**

(Kit 2 pieces)








Art. nr. 5035270710015



Thermostatic head quotes

If ordered separately from the radiator, the accessories are available in standard white only


Art. nr. are referred to colour WHITE R01

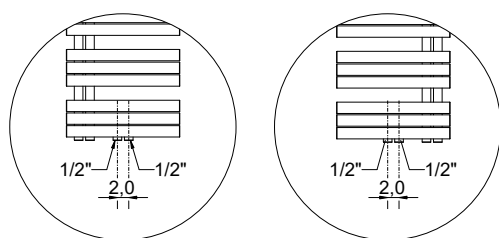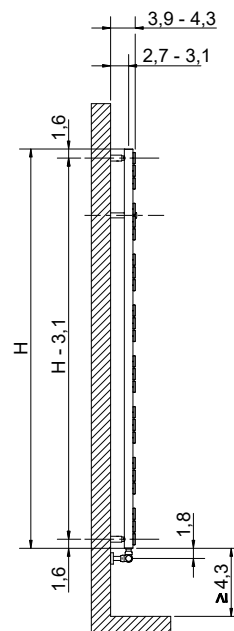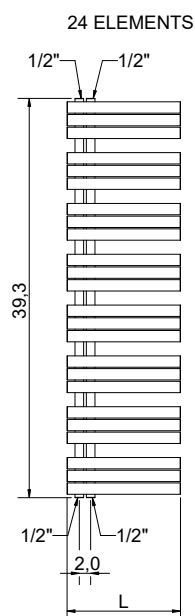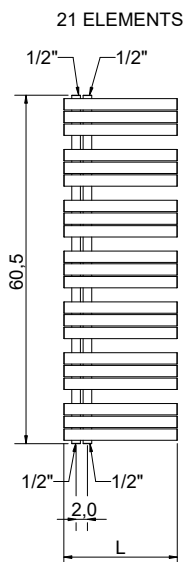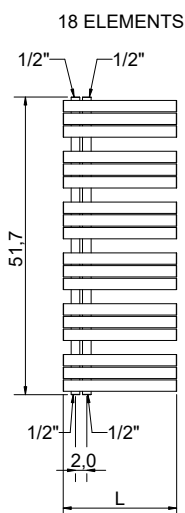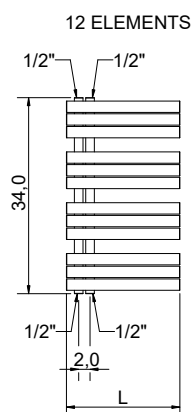Detail of central connection
(collectors on the left)Detail of central connection
(collectors on the right)

Quotes for Kristal valves


KELLY 5010

Height [in]	Width L [in]	Art. nr.	Thermal output [Btu]					Exp. n	Dual energy kit [Btu]
			Dry Weight [lbs]	Surface [Sq ft²]	Water content [gal]	Δt=122°F	Δt=86°F		
34,0	19,7	3551726100025	18,74	9,36	1,03	1300	696	1,2243	1365
	23,6	3551726100029	21,61	10,87	1,14	1512	798	1,2536	1365
51,7	19,7	3551726100026	28,00	14,10	1,53	1921	1024	1,2351	1706
	23,6	3551726100030	32,19	16,25	1,72	2174	1146	1,2533	2047
60,5	19,7	3551726100027	32,85	16,47	1,80	2225	1164	1,2695	2047
	23,6	3551726100031	37,70	19,05	2,01	2532	1324	1,2696	2388
69,3	19,7	3551726100028	37,48	18,84	2,06	2484	1290	1,2837	2388
	23,6	3551726100032	42,99	21,74	2,30	2986	1553	1,2781	3071

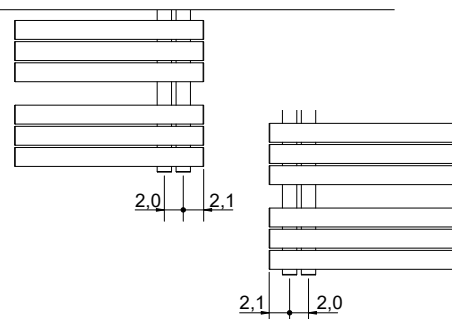


KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE RIGHT)

Height [in]	Width L [in]	Art. nr.
34,0	19,7	3551726100041
	23,6	3551726100045
51,7	19,7	3551726100042
	23,6	3551726100046
60,5	19,7	3551726100043
	23,6	3551726100047
69,3	19,7	3551726100044
	23,6	3551726100048



KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE LEFT)

Height [in]	Width L [in]	Art. nr.
34,0	19,7	3551726100033
	23,6	3551726100037
51,7	19,7	3551726100034
	23,6	3551726100038
60,5	19,7	3551726100035
	23,6	3551726100039
69,3	19,7	3551726100036
	23,6	3551726100040



Art. nr. are referred to colour WHITE R01

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired Δt/50)ⁿ