



LOLA[®] HORIZONTAL

POLISHED STAINLESS STEEL



PAGE 22

3D
TRADEMARK



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with $\varnothing$ of 38 mm.
Curved heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD

GOLD VILLA
AWARD

ACCESSORIES



Elegant square polished manual valve kit

Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301084

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990301083



Elegant reverse manual polished valve kit


Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301082

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990301081




Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223



Measures for Elegant square manual valve










Measures for Elegant reverse manual valve



Pipe covering kit for polished valves






Art. Nr. 5103000000044

Accessories and spare parts- see from page 394.

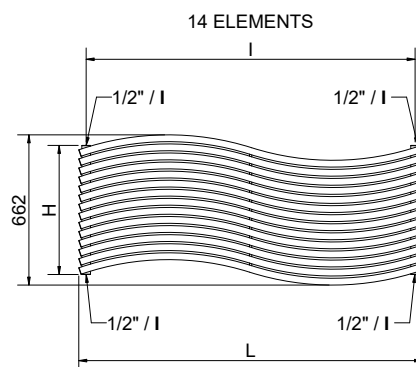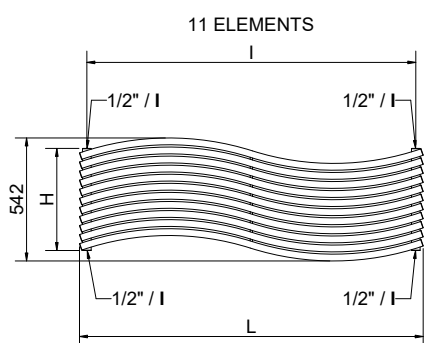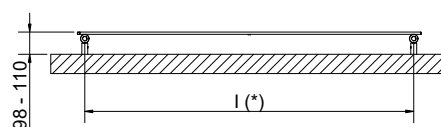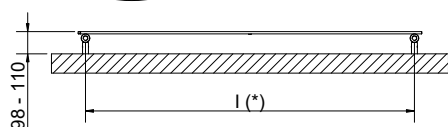


(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections



Special connection

Indicate the pipe centres X



Always specify the kind of connection needed when ordering (from H1 to H7).

Legend = ► In ▷ Out ◀ Airvent H Height I Pipe Centres L Width □ Connection

LOLA® HORIZONTAL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	Δt = 50°C	Δt = 30°C	
3551740000005	H1	450	1516	1450	15,5	1,45	4,1	507	264	1,2746
3551740000004		570	1516	1450	19,0	1,84	5,1	645	334	1,2878
3551740000050	H2	450	1516	-	15,5	1,45	4,1	507	264	1,2746
3551740000107		570	1516	-	19,0	1,84	5,1	645	334	1,2878
3551740000108	H3	450	1516	-	15,5	1,45	4,1	507	264	1,2746
3551740000095		570	1516	-	19,0	1,84	5,1	645	334	1,2878
3551740000042	H4	450	1516	530	15,5	1,45	4,1	507	264	1,2746
3551740000068		570	1516	650	19,0	1,84	5,1	645	334	1,2878
3551740000080	H5	450	1516	530	15,5	1,45	4,1	507	264	1,2746
3551740000058		570	1516	650	19,0	1,84	5,1	645	334	1,2878
3551740000053	H6	450	1516	390	15,5	1,45	4,1	507	264	1,2746
3551740000014		570	1516	510	19,0	1,84	5,1	645	334	1,2878
3551740000051	H7	450	1516	390	15,5	1,45	4,1	507	264	1,2746
3551740000055		570	1516	510	19,0	1,84	5,1	645	334	1,2878

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)ⁿ