



LOLA[®] HORIZONTAL

SATIN STAINLESS STEEL



PAGE **16**

3D



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in satin stainless steel with $\varnothing$ of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2" - n° 1 x G 1/2"

AWARD

GOLD VILLA
AWARD

ACCESSORIES



Elegant manual square satin valve

Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990320209

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990320208



Elegant manual reverse satin valve


Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990320207

Multilayer connection $\varnothing$ 16 x2
Art. Nr. 5991990320206




Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224



Measures for Elegant square manual valve










Measures for Elegant reverse manual valve



Pipe covering kit for satin valves






Art. Nr. 5103000000045

Accessories and spare parts- see from page 394.

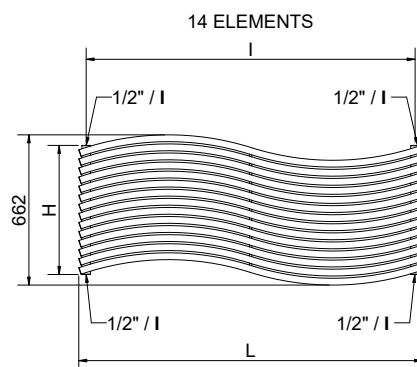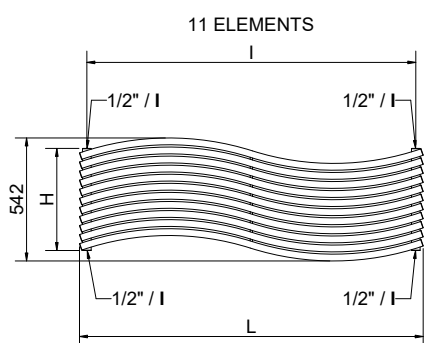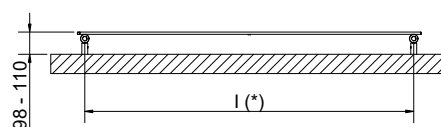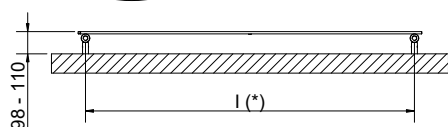


(*) The fixing kit has the same pipe centre (I) as the radiator

Standard connections



Special connection

Indicate the pipe centres X



Always specify the kind of connection needed when ordering (from H1 to H7).

Legend = ► In ▷ Out ◄ Airvent H Height I Pipe Centres L Width □ Connection

LOLA® HORIZONTAL - SATIN STAINLESS STEEL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	Δt = 50°C	Δt = 30°C	
3551740000001	H1	450	1516	1450	15,5	1,45	4,1	549	287	1,2712
3551740000013		570	1516	1450	19,0	1,84	5,1	698	363	1,2804
3551740000106	H2	450	1516	-	15,5	1,45	4,1	549	287	1,2712
3551740000064		570	1516	-	19,0	1,84	5,1	698	363	1,2804
3551740000094	H3	450	1516	-	15,5	1,45	4,1	549	287	1,2712
3551740000093		570	1516	-	19,0	1,84	5,1	698	363	1,2804
3551740000027	H4	450	1516	530	15,5	1,45	4,1	549	287	1,2712
3551740000061		570	1516	650	19,0	1,84	5,1	698	363	1,2804
3551740000063	H5	450	1516	530	15,5	1,45	4,1	549	287	1,2712
3551740000070		570	1516	650	19,0	1,84	5,1	698	363	1,2804
3551740000036	H6	450	1516	390	15,5	1,45	4,1	549	287	1,2712
3551740000085		570	1516	510	19,0	1,84	5,1	698	363	1,2804
3551740000067	H7	450	1516	390	15,5	1,45	4,1	549	287	1,2712
3551740000082		570	1516	510	19,0	1,84	5,1	698	363	1,2804

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n