

NAIKE SQUARE

WARRANTY 5 YEARS



Color: RAL 9016 - R02 Traffic white

FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

MATERIAL:

- 30x30 mm frame collector in painted mild steel.
- 15x20 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages II and III.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy (see page 350)

AVAILABLE ACCESSORIES



Kristal valve Total Color, angled with thermostatic option, colored




Total Color, Kristal valve, angled pipe centres 50 mm Right or Left with thermostatic option, colored




Thermostatic head Kristal TC fully colored

Complete list, codes and details of the ACCESSORIES from page 332.



Detail of the 50 mm pipe-centres version.

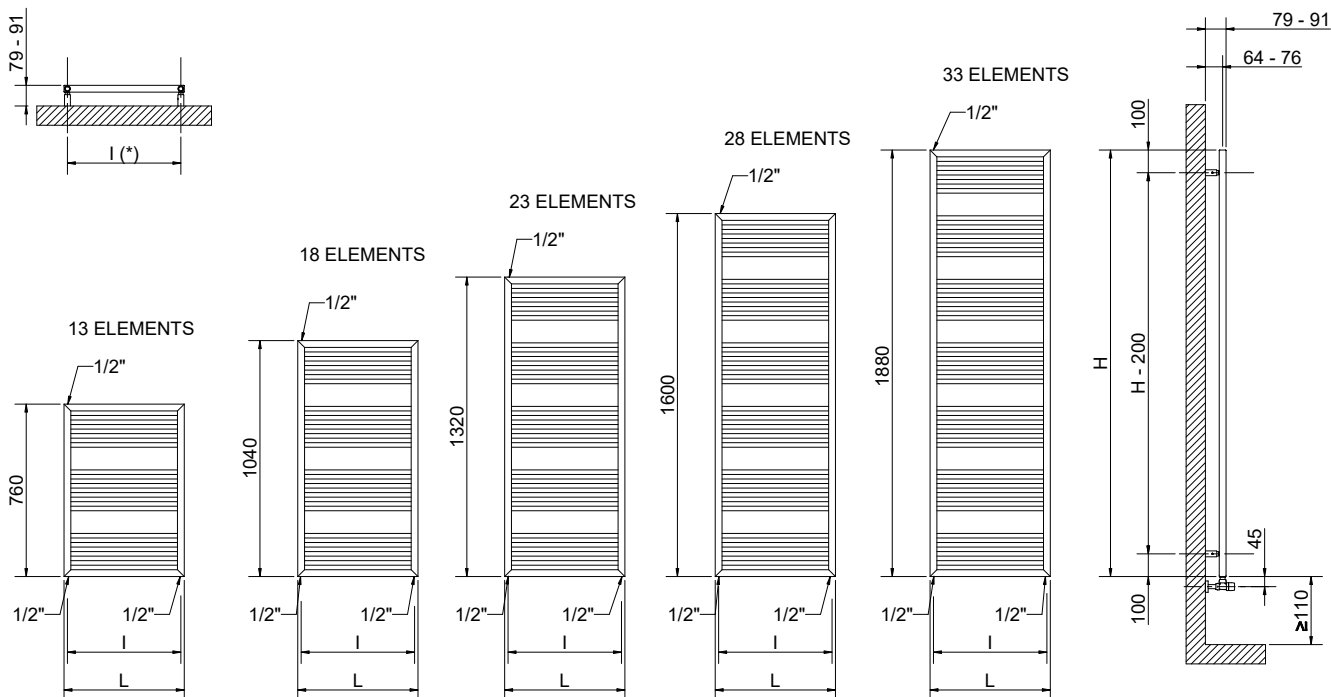

(*) The fixing kit has the same pipe centre (I) as the radiator

Quotes for Kristal valves

NAIKE SQUARE

NAIKE SQUARE				PIPE CENTRES 50 mm		Thermal output						
Height	Width	Pipe Centres	Art. nr.	Art. nr.	Dry Weight	Surface	Water content	Δt 50°C	Δt 30°C	Exp.	Dual energy kit	
[mm]	L [mm]	I [mm]	R01 White	R01 White	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]	
760	480	450	3551826102021	3551826102029	7,00	0,60	2,90	350	191	1,1867	300	
	530	500	3551826102025	3551826102033	7,60	0,65	3,10	381	208	1,1886	300	
	580	550	3551826102005	3551826102015	8,20	0,70	3,40	412	224	1,1904	400	
1040	480	450	3551826102022	3551826102030	9,20	0,80	00,00	459	246	1,2193	400	
	530	500	3551826102026	3551826102034	10,00	0,85	4,00	499	268	1,2142	500	
	580	550	3551826102006	3551826102016	10,80	0,92	4,30	538	290	1,2092	500	
1320	480	450	3551826102002	3551826102012	11,40	0,97	4,60	568	303	1,2307	500	
	530	500	3551826102004	3551826102014	12,40	1,05	4,90	617	330	1,2242	600	
	580	550	3551826102008	3551826102018	13,30	1,14	5,20	667	358	1,2177	600	
1600	480	450	3551826102023	3551826102031	13,70	1,16	5,50	679	364	1,2221	600	
	530	500	3551826102027	3551826102035	14,80	1,26	5,80	739	397	1,2156	700	
	580	550	3551826102009	3551826102019	15,90	1,36	6,20	799	431	1,2092	700	
1880	480	450	3551826102024	3551826102032	15,90	1,35	6,30	793	427	1,2135	700	
	530	500	3551826102028	3551826102036	17,20	1,46	6,70	864	467	1,2071	700	
	580	550	3551826102010	3551826102020	18,50	1,57	7,10	936	507	1,2007	900	

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$