



STEFANIA

POLISHED STAINLESS STEEL

WARRANTY
10 YEARS

MATERIAL:

- Vertical collectors in polished stainless steel $\varnothing$ 1,2 inch.
- Horizontal elements in polished stainless steel da 1,2x0,4 inch.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

P. Max: 8 bar

Functioning: hot water

T. Max: 230° F

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES




ACCESSORIES



Kristal valve square with thermostatic option chromed

Copper conn. $\varnothing$ 12/14/15
Art. nr. 5991990311165

Multilayer conn. $\varnothing$ 16
Art. nr. 5991990311166




Quotes for square Kristal valves with thermostatic option



Kristal corner valve with thermostatic option chromed

Copper conn. $\varnothing$ 12/14/15
Art. nr. 5991990301148

Multilayer conn. $\varnothing$ 16
Art. nr. 5991990301147



Quotes for corner Kristal valves with thermostatic option




Kit 2 hooks polished stainless steel

Art. nr. 5991990010218










Pair of polished tube cover kit

Art. nr. 5103000000061



Detail of the pipe centres 2,0 inch version

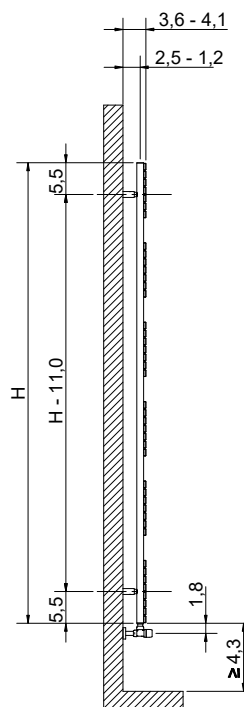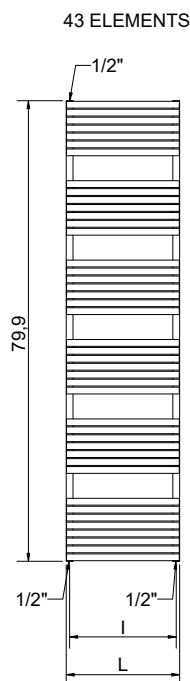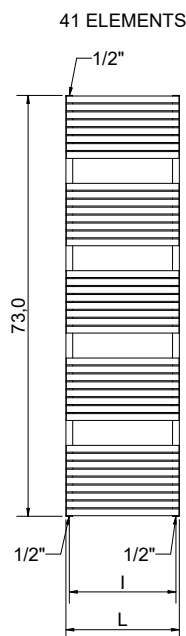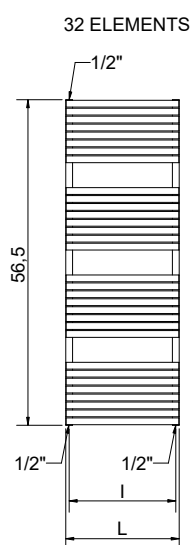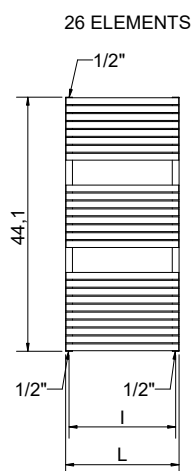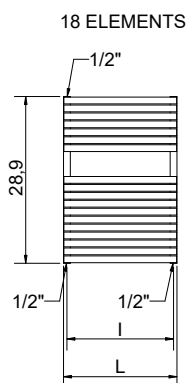

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

STEFANIA POLISHED STAINLESS STEEL

STEFANIA POLISHED STAINLESS STEEL				Pipe centres 2,0 inch		Thermal output [Btu]					Dual energy kit
Height [in]	Width L [in]	Pipe centres l [in]	Art. nr.	Art. nr.	Dry Weight [lbs]	Surface [Sq ft²]	Water content [gal]	Δt=122°F	Δt=86°F	Exp. n	[Btu]
28,9	15,7	14,6	3551610130100	3551610130120	17,64	7,64	0,58	744	406	1,1913	-
	19,7	18,5	3551610130104	3551610130124	20,94	9,15	0,66	1235	672	1,1918	1024
44,1	15,7	14,6	3551610130101	3551610130121	25,57	11,19	0,85	1024	549	1,2244	1024
	19,7	18,5	3551610130105	3551610130125	30,42	13,46	0,98	1245	669	1,2194	1024
	23,6	22,4	3551610130109	3551610130129	35,27	15,61	1,11	1471	792	1,216	1365
56,5	15,7	14,6	3551610130102	3551610130122	31,75	13,89	1,06	1256	662	1,2492	1024
	19,7	18,5	3551610130106	3551610130126	37,70	16,68	1,22	1535	816	1,2401	1365
	23,6	22,4	3551610130110	3551610130130	43,65	19,38	1,40	1812	966	1,2338	1706
73,0	15,7	14,6	3551610130103	3551610130123	40,57	17,87	1,37	1651	856	1,2865	1706
	19,7	18,5	3551610130107	3551610130127	48,28	21,42	1,59	2017	1054	1,2712	2047
	23,6	22,4	3551610130111	3551610130131	56,00	24,97	1,80	2378	1249	1,2606	2388
79,9	19,7	18,5	3551610130108	3551610130128	51,15	22,60	1,69	2133	1109	1,2781	2047
	23,6	22,4	3551610130112	3551610130132	59,08	26,26	1,90	2515	1317	1,2665	2388
	31,5	30,3	3551610130113	3551610130133	75,40	33,69	2,32	3282	1733	1,2515	3412

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{desired } \Delta T / 50)^n$