

ROSY MIRROR

WARRANTY 5 YEARS



Color: F22 Classic gold

FEATURES

P. max: 5 bar

Functioning: hot water

T. max: 110°C

Connections: n° 2 x 1/2" G - 1 x 1/8" G

MATERIAL:

- Ø 38 mm horizontal collectors in painted mild steel.
- 50x10 mm vertical heating elements in painted mild steel.
- Mirror

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.

PACKAGING:

The radiator is delivered in a wooden crate.
User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).


COLORS:

See color chart on pages II and III.


CERTIFICATES



STANDARD CONNECTIONS



SPECIAL CONNECTIONS



LEGEND

▶ In	I Pipe Centres
▷ Out	L Width
≡ Airvent	□ Connection
H Height	■ Welded cap

Always specify the kind of connection needed when ordering.
Bidirectional pipe connection not available.

HOW TO ORDER THE ROSY MIRROR RADIATOR

Radiator model E.g. ROSY MIRROR lateral mirror on the left	Nr of Elements E.g. 6 Elements	Height in mm Example: 1800 mm	Connection code Example: connection V01	Color code Es: R01 - White	Constant value
MS50	06	180	V01	R01	A

Example of article code creation

MS50 ROSY MIRROR lateral mirror on the left
06 6 Elements (see table on the side)
180 Height 1800 mm (see table on the side)
V01 Connection V01 (see above)
R01 Color R01 - White (see color chart)
A Constant value

The article code will be:


MS50 06 180 V01 R01 A

AVAILABLE ACCESSORIES


Kristal valve Total Color, angled with thermostatic option, colored	KIT 2 WOODEN SHELVES - 162 x 100 mm		KIT 2 WOODEN SHELVES - 218 x 100 mm	
	for ROSY MIRROR central version		for ROSY MIRROR lateral version	
	Finishing		Finishing	
	- White		- White	
	- Bay Oak		- Bay Oak	
	- Wengé		- Wengé	

Complete list, codes and details of the ACCESSORIES from page 332.


VERSION WITH CENTRAL MIRROR - MC50

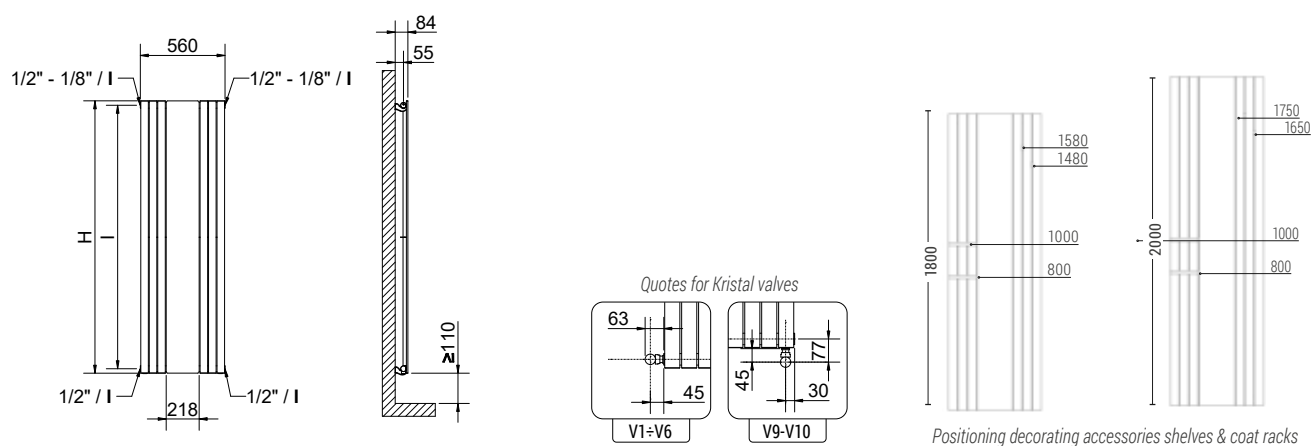

VERSION WITH MIRROR ON THE RIGHT SIDE - MD50

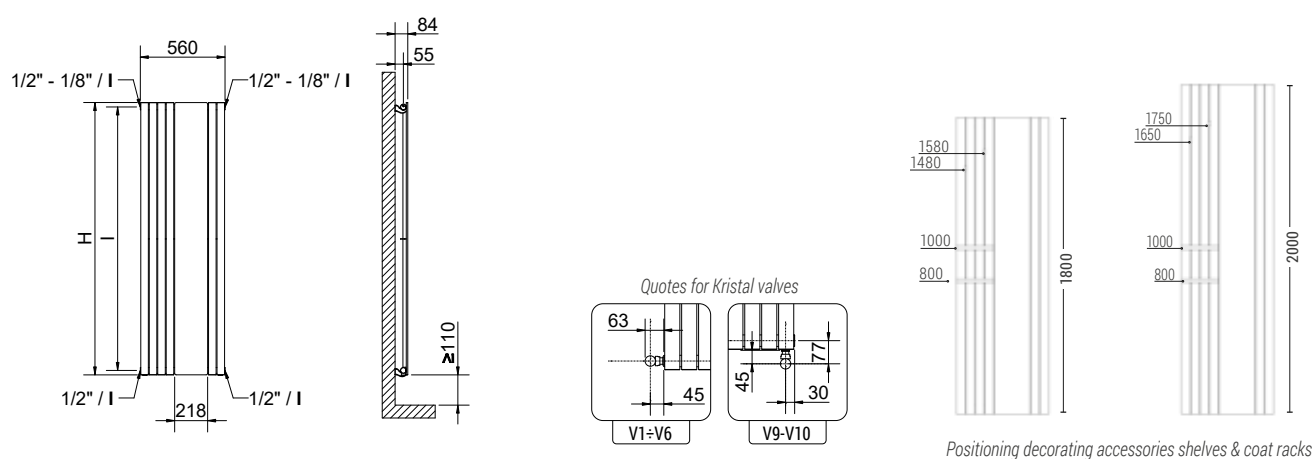

VERSION WITH MIRROR ON THE RIGHT SIDE - MS50

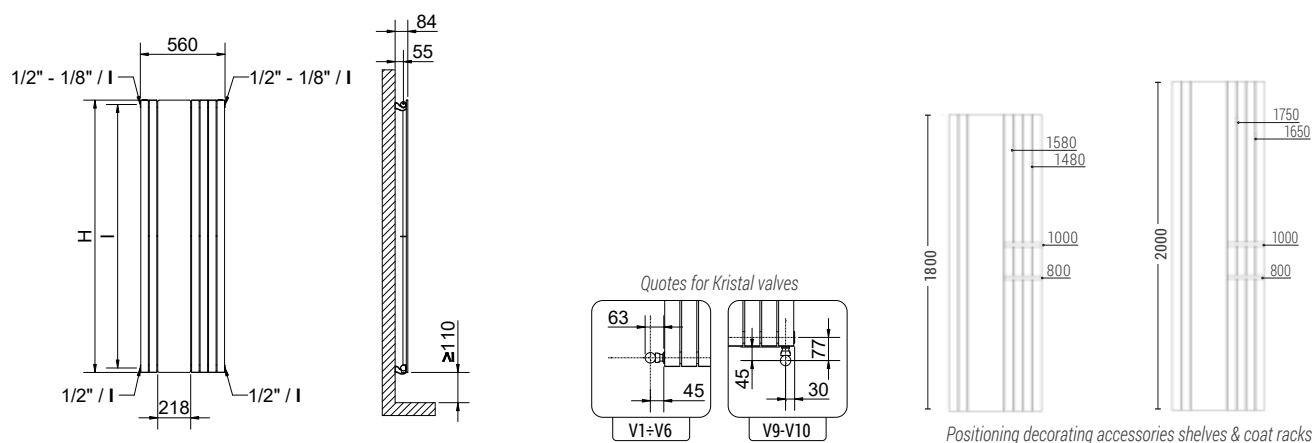

ROSY MIRROR

ROSY MIRROR								Thermal output			
Height	Width	Pipe Centres	Mirror			Dry Weight	Surface	Water content	Δt=50°C	Δt=30°C	Exponent
[mm]	L [mm]	I [mm]	CENTRAL	LATERAL ON THE RIGHT	LATERAL ON THE LEFT	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n
1800	560	1742	MC50	MD50	MS50	22,4	1,43	5	684	355	1,2840
2000	560	1942				24,6	1,57	5,5	756	391	1,2826

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: $\text{desired output} = \text{output at } \Delta T 50 \times (\text{Desired } \Delta T / 50)^n$