

KELLY 5010 ELITE

WARRANTY 5 YEARS



NEW



Color: T23 Powder

FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 2 x 1/2" G

MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLORS:

See color chart on pages II and III.

ACCESSORIES INCLUDED:

Kelly 5010 Elite is supplied with:

- 2 hooks
 - Kristal valve kit with Ø12/14mm copper and Ø 16mm multilayer fittings
 - Kristal TC thermostatic head and pipe cover kit
- All matching the radiator color.

CERTIFICATES



AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy (see page 350)

ACCESSORIES INCLUDED



Colored valve kit, complete with fittings for copper Ø 12-14 and multilayer Ø 16 connection, TC thermostatic head and pipe cover kit




Kit 2 colored hooks









Colored fixing kit

Complete list, codes and details of the ACCESSORIES from page 332.




Detail of the 50 mm pipe-centres version.

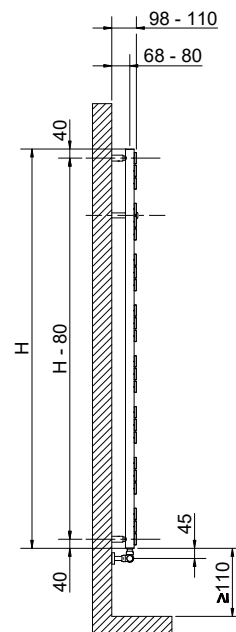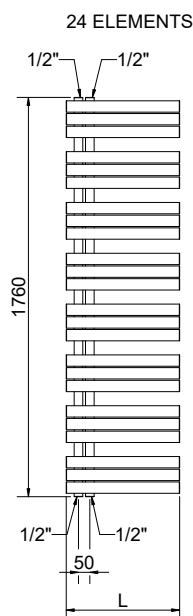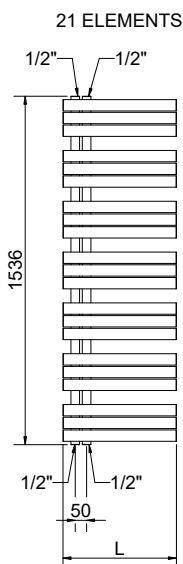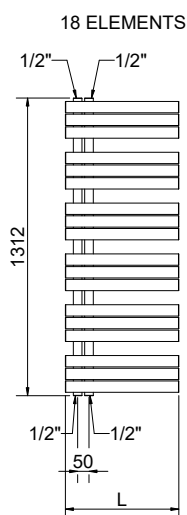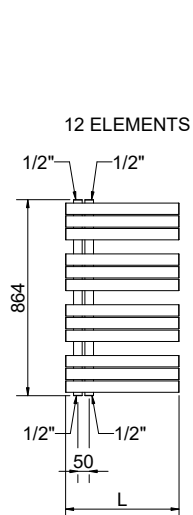


KELLY 5010 ELITE DX

Height	Width	Art. nr.	Surface	Water content	Thermal output		Exp.	Dual energy kit
					Δt 50°C	Δt 30°C		
[mm]	L [mm]	R01 White	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
864	500	3551726100066	0,87	3,9	381	204	1,2243	400
	600	3551726100070	1,01	4,3	443	234	1,2536	400
1312	500	3551726100067	1,31	5,8	563	300	1,2351	500
	600	3551726100071	1,51	6,5	637	336	1,2533	600
1536	500	3551726100068	1,53	6,8	652	341	1,2695	600
	600	3551726100072	1,77	7,6	742	388	1,2696	700
1760	500	3551726100069	1,75	7,8	728	378	1,2837	700
	600	3551726100073	2,02	8,7	875	455	1,2781	900



KELLY 5010 ELITE SX

Height	Width	Art. nr.	Surface	Water content	Thermal output		Exp.	Dual energy kit
					Δt 50°C	Δt 30°C		
[mm]	L [mm]	R01 White	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
864	500	3551726100074	0,87	3,9	381	204	1,2243	400
	600	3551726100078	1,01	4,3	443	234	1,2536	400
1312	500	3551726100075	1,31	5,8	563	300	1,2351	500
	600	3551726100079	1,51	6,5	637	336	1,2533	600
1536	500	3551726100076	1,53	6,8	652	341	1,2695	600
	600	3551726100080	1,77	7,6	742	388	1,2696	700
1760	500	3551726100077	1,75	7,8	728	378	1,2837	700
	600	3551726100081	2,02	8,7	875	455	1,2781	900



To order **Kelly 5010 Elite** you just need to choose size and color

The codes shown in the table refer to the R01 White color models

For output at different ΔT , please refer to the following formula: **desired output = output at ΔT 50 x (Desired ΔT /50)ⁿ**